




## SERIES MON-AMYB-5220 NON-CONTACT LIMIT SWITCH



- Clear ektar copolyester cover.
- Die cast aluminum enclosure.
- Indicator shaft is secured to the housing unit.
- Flat cover version available.
- Environmentally sealed indicator.
- Minimum life of 1,000,000 cycles.
- Internal switches and terminal block.
- Optional thermoplastic quick-mount bracket.
- Indicator is 100% adjustable.
- Nema 4, 4X.
- CSA approval.

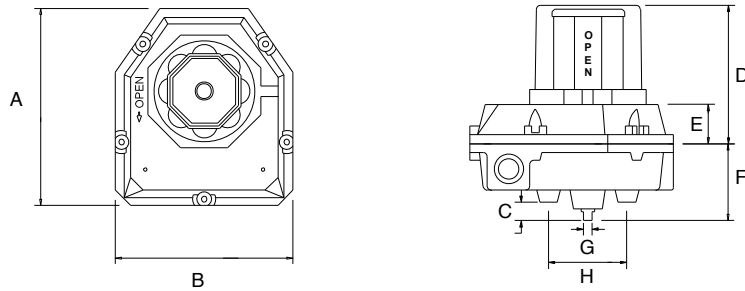

| A    | B    | C    | D    | E    | F    | G    | H    |
|------|------|------|------|------|------|------|------|
| 6.56 | 6.00 | 0.53 | 3.98 | 1.13 | 2.72 | 0.25 | 2.25 |

| ITEM TYPE             | SPECIFICATIONS    |
|-----------------------|-------------------|
| Nema rating           | 4, 4X, 7, 9       |
| Housing-cover         | Aluminum          |
| Indicator cover       | Ektar copolyester |
| Seals                 | BUNA-N            |
| Fasteners             | Stainless steel   |
| Terminal points       | 8                 |
| Operating temperature | -40°F to 175°F    |
| Agency approvals      | CSA               |
| Weight                | 4.25 lbs.         |

| MODEL         | DESCRIPTION            | SUFFIX | US\$   |
|---------------|------------------------|--------|--------|
| MON-AMYB-5220 | 2 SPDT 3A non-contact  | AM52   | 694.00 |
| MON-BKT-NP120 | SS bracket kit 52-100  | -      | 55.00  |
| MON-BKT-NP130 | SS bracket kit 115-300 | -      | 55.00  |