




## SERIES **NBN4-F25-E8-V1** **M12 PNP DUAL NO**



- Direct mounting on standard actuators.
- Small construction with sturdy plastic housing of protection class IP67.
- LED for power on.
- M12 male connector.

### ACCESSORIES REQUIRED FOR OPERATION INCLUDE:

- BT32 activator for F25 series (see I, J, K.)
- V1-G-2-PVC cable for above 2 meters long.
- OR
- V1-G-10-PVC cable for above 10 meters long.

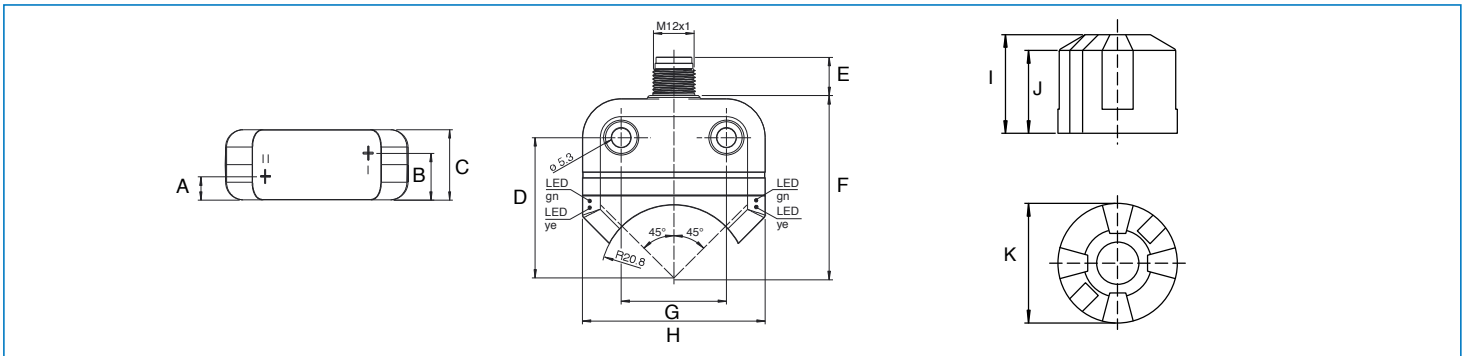

A	B	C	D	E	F	G	H	I	J	K
0.28	0.51	0.79	1.57	0.43	2.05	1.18	2.05	1.26	1.10	1.57

ITEM TYPE	SPECIFICATIONS
Item category	Inductive proximity
Subcategory	General purpose
Power type	DC
Range	0 to 3.24 mm
Connection type	4PINM12
Output type	NO PNP
Body composition	Non-metallic
Operating voltage range	10~30 VDC
Sensing type	Side
Status indicator	Yes
Short circuit protection	Yes
Rev. polarity protection	Yes
Max. load current	0.2A
Approvals	cULus
Net weight	1.80 oz.
Gross weight	1.80 oz.

MODEL	DESCRIPTION	SUFFIX	US\$
NBN4-F25-E8-V1	M21 PNP dual NO	F25	319.00
BT32	Activator for NBN4-F25-E8-V1	-	64.00
V1-G-2M-PVC	M12 4-pin PVC cable for above 2M long	-	44.00
V1-G-10M-PVC	M12 4-pin PVC cable for above 10M long	-	74.00