




SERIES NMR4-C*

4-WAY CONDUIT CONNECTION

- 4-way single solenoid NAMUR valve.
- Ports 1/2" NPT.
- Duty cycle 100% continuous.
- Pressure range 20 to 120 PSIG.
- Temperature range 35°F to 130°F (normal).

MODEL	VOLTAGE	IN RUSH	POWER CONSUMPTION	SUFFIX
NMR4-C1	110VAC	62 mA	3.5w	4C1
NMR4-C2	24VDC	105 mA	3.5w	4C2
NMR4-C12	12VDC	204 mA	3.5w	4C12
NMR4-C22	220VAC	31 mA	3.5w	4C22
NMR4-C24	24VAC	C/F	3.5w	4C24

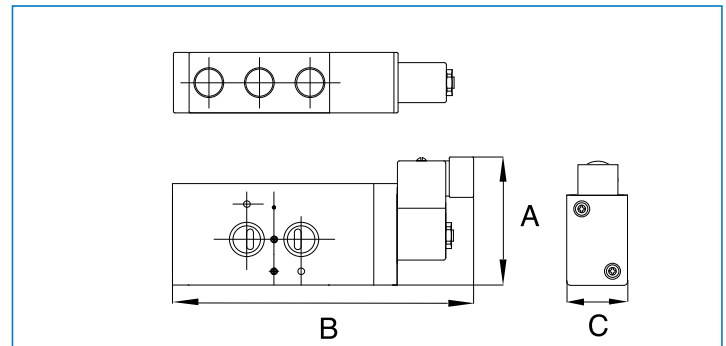

A	B	C
3.16	7.40	1.18




SERIES NMR4-D*

4-WAY DIN CONNECTION

- 4-way single solenoid NAMUR valve.
- Ports 1/2" NPT.
- Duty cycle 100% continuous.
- Pressure range 20 to 120 PSIG.
- Temperature range 35°F to 130°F (normal).

MODEL	VOLTAGE	IN RUSH	POWER CONSUMPTION	SUFFIX
NMR4-D1	110VAC	62 mA	3.5w	4D1
NMR4-D2	24VDC	105 mA	3.5w	4D2
NMR4-D12	12VDC	204 mA	3.5w	4D12
NMR4-D22	220VAC	31 mA	3.5w	4D22
NMR4-D24	24VAC	C/F	3.5w	4D24

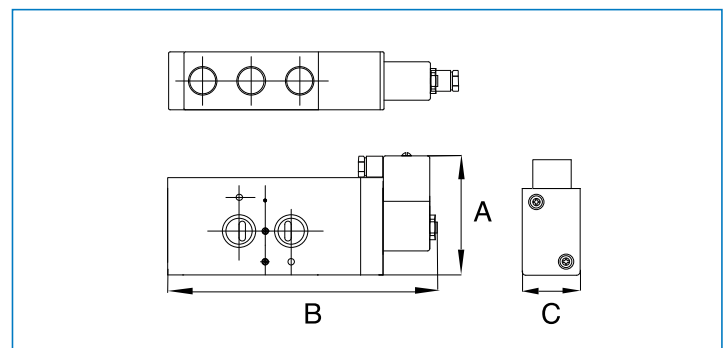

A	B	C
3.03	7.05	1.18