




SERIES **SSNMR1-***

4-WAY STAINLESS STEEL SOLENOID VALVE

- 4-way single solenoid namur valve.
- Available in din and conduit connections.
- Cv=1.68.
- Ports 1/4" NPT.
- Duty cycle 100% continuous.
- Pressure range 20 to 120 PSIG.
- Temperature range 35°F to 130°F (normal).

MODEL	VOLTAGE	IN RUSH	POWER CONSUMPTION	SUFFIX
SSNMR1-*1	110VAC	62 mA	3.5w	SSC1
SSNMR1-*2	24VDC	105 mA	3.5w	SSC2
SSNMR1-*12	12VDC	204 mA	3.5w	SSC12
SSNMR1-*22	220VAC	31 mA	3.5w	SSC22
SSNMR1-*24	24VAC	C/F	3.5w	SSC24

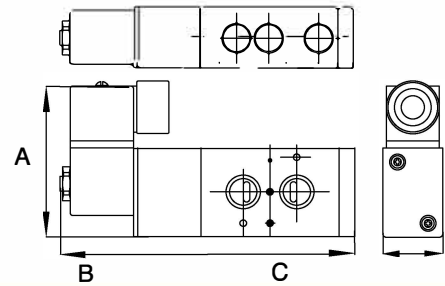

A	B	C
2.90	5.23	1.07




SERIES **SSNMR1-EX***

4-WAY STAINLESS STEEL EX-PROOF SOLENOID VALVE

- 4-way single solenoid namur valve.
- Available in din and conduit connections.
- Cv=1.68.
- Ports 1/4" NPT.
- Duty cycle 100% continuous.
- Pressure range 20 to 120 PSIG.
- Temperature range 35°F to 130°F (normal).

MODEL	VOLTAGE	IN RUSH	POWER CONSUMPTION	SUFFIX
SSNMR1-EX1	120 VAC	74 mA	4.6w	SSEX1
SSNMR1-EX2	24 VDC	190 mA	4.6w	SSEX2
SSNMR1-EX12	12 VDC	372 mA	4.6w	SSEX12
SSNMR1-EX22	220 VAC	36 mA	4.6w	SSEX22

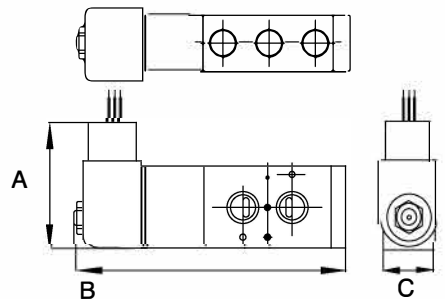

A	B	C
2.66	5.23	1.07